TS-WD33Plus Walk through metal detector

The Global Leader of Security Metal Detectors and Checkpoint Screening

4-8 hours backup battery ; Automatically count passengers and alarm times ; IN / OUT counter: bi-directional counter default is without backup batter

Harmless to human body: is harmless with heart pacemaker, pregnant women, magnetic floppy, recording tapes, etc.

High sensitivity: Ferrous/ non-ferrous /Alloy can be detected 30 preset programs for security applications

100 frequencies for option. To work with neighbouring gates at 40cm ; Harmless to human body: is harmless with heart pacemaker, pregnant women, magnetic floppy, recording tapes, etc



7 inch color LCD screen, Infrared remote control ; Using high density fireproof material ; Sound & LED alarm: Two Sides LED indicator easily show where the metal is

33 detecting zones, Simultaneous alarm from multi- zones;
Sensitivity adjustable: Each zone has 999 sensitivity level

Alarm volume range from level 0 to 9
Alarm tones: Change from 1 to 9
PASS and ALARM count up to 99999

Automatically count passengers and alarm times ; Sensitivity Test piece: One yuan Coin, omnidirectional detection ,Can be customized 36 zones

PARAMETERS

- **Gross weight:** 50KG
- **Power Supply:** AC85V-264V / 47.5-60Hz ; Power <15W
- **Working temperature:**-40℃--+70℃
- **Working :** Waterproof can be used outside
- **Package size for door panels:** 2290*660*190mm *1ctn
- **Package size for control unit:** 760*380*260m*1ctn
- **Standard External size:** 2200mm(H)X800mm(W)X580mm(D)
- **Standard Internal size:** 2010mm(H)X700mm(W)X500mm(D)

USE DOMAIN

Port Airport Train Station Hospital

Hotel Factory Government Bank

Usage condition

TS-WD33Plus

Pinpoint Zone Detection

Theexclusive multiple target pinpointing with 33/36 zones standard shows precise target location on the left, center and right side of the body from head to toe.

Program


When the program is self-diagnostic, it does not require initial or periodic calibration,modularization design,easy for maintenance and replacement.

Installation

TS-WD33T design only 2 cables and 8 screws, operation instructions are simple. High density refractories are used to make the product stronger.




PRODUCT DETAILS

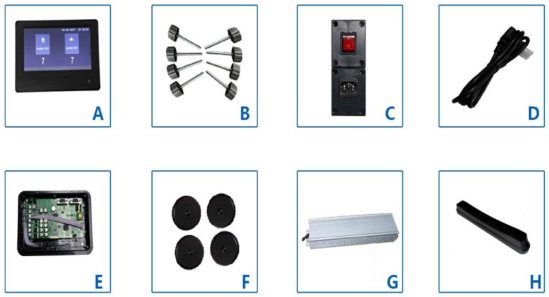


A. 7 Inch Color LCD Screen: Easy show and operate;
B. 8 Screws: Easy assembly and install;
C.Socket: Easy connect both door panels;
D. Power Line : Support UK / European / USA standard;
E. Integrated Circuit Board : Intelligent and Stably
F.Infrared Sensor : Accuracy check;
G. Backup Battery: Support 4-8 hours (optional) ;
H. Foot Cover: Easy fastness

TS-WD33Plus'Access Control Panel is designed for use by authorized personnel with specific, multi-level security with password protection, only the authorized person can operate ; Sound & LED alarm: Both Side LED indicator ,easily show where the metal is, Automatically count passengers and alarm times.

PRODUCT PACKAGING





Recycling

Carton Dimension L*W*H (mm)
Door Panel : 2290*660*190
Control Unit :760*380*260
Gross weight :70KG
Volume:0.32cbm/pcs

We will arrange the most suitable logistics according to the actual situation and the customer's requirements. Our packing is very tight to prevent any breakage during shipment.